MARINE DIESEL ENGINE

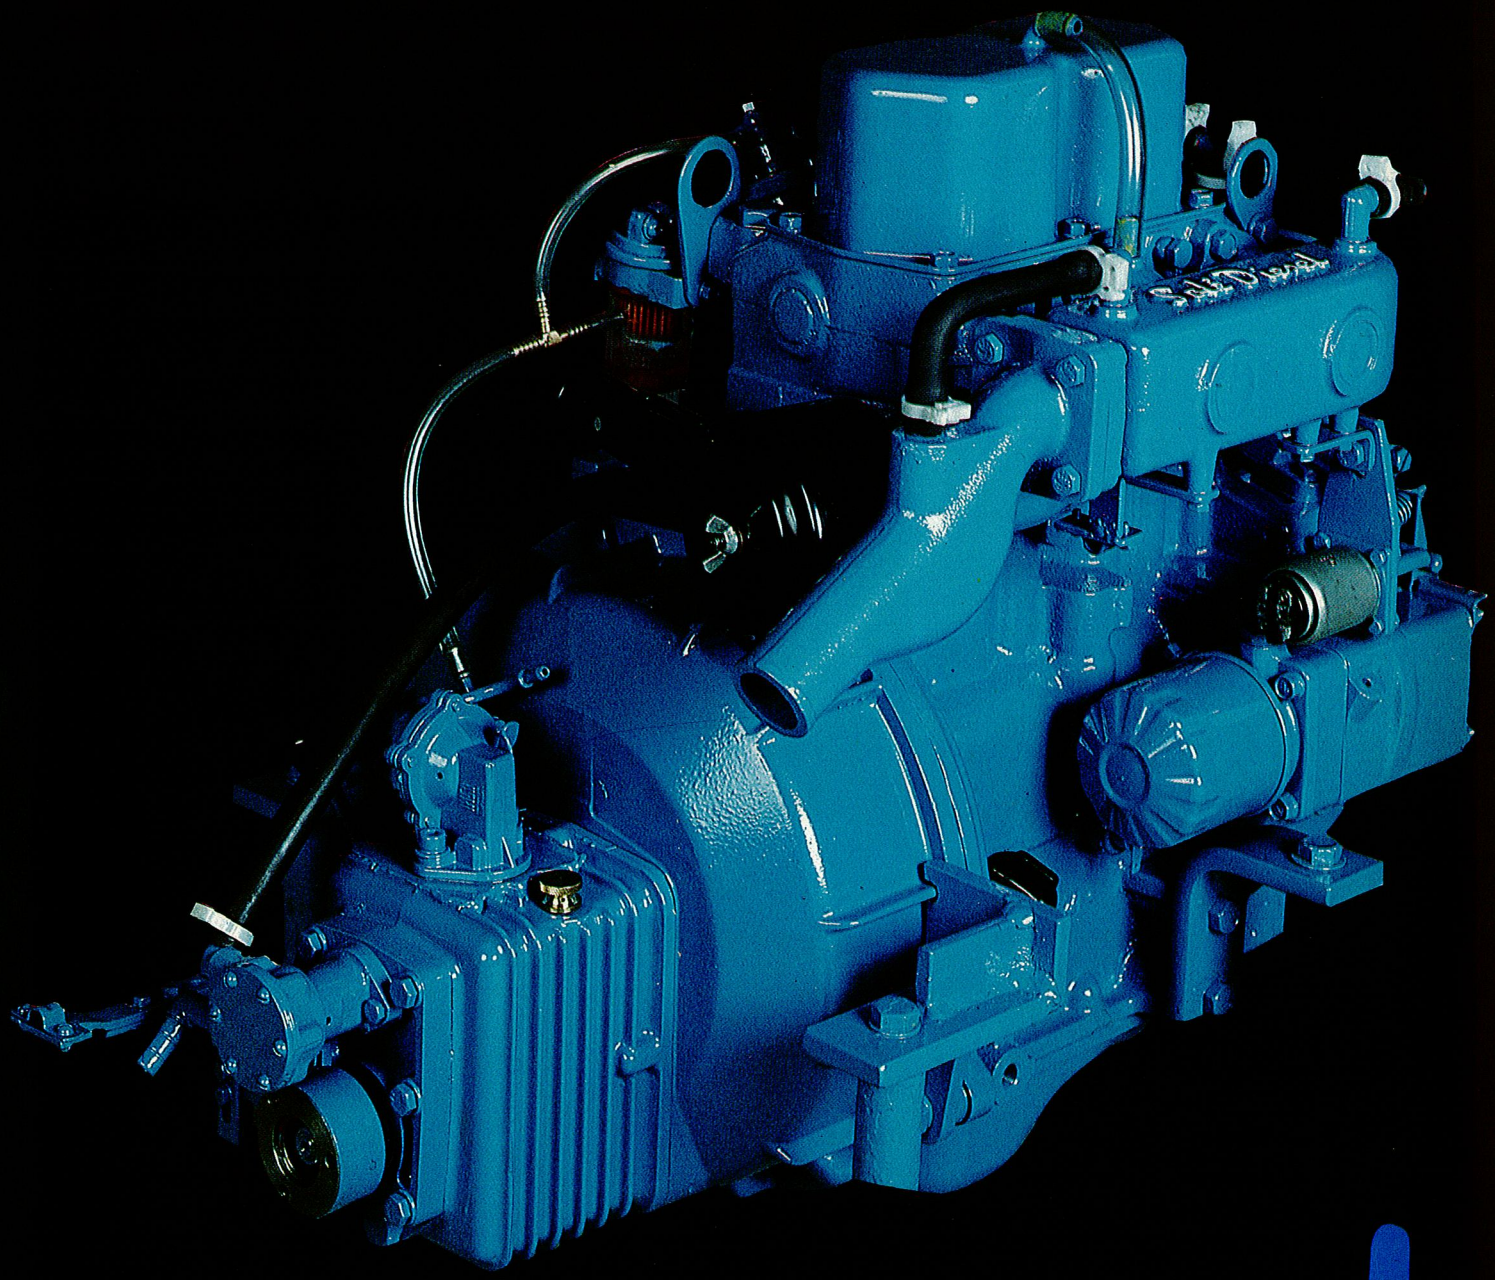

Solé Diesel

MINI-18 ENGINE

SPECIFICATIONS:

N.° of cylinders:	2 in line
Power:	17 Hp. (12,5 Kw.) at 3.000 r. p. m.
Bore × stroke:	78 mm. × 80 mm.
Total capacity:	764 c.c.
Compression ratio:	23:1
Injection system:	Indirect.
Cooling:	Direct sea water cooling, with forced circulation pump.
Electrical equipment:	12 V. Starter 1,2 Kw. Alternator 35 A.
Reverser:	RONIM-III Type, Mechanical, ratio 1,91:1
Weight with reverser:	130 Kg.
Installation angle:	17 ° continuous.

Standard equipment: Electric motor and alternator, electric stop, supply pump, oil filter, oil extraction pump, cooled exhaust pipe, light panel with warning lamps and ignition switch, elastic suspension and Morse control coupling kits.

Optional equipment: Bilge cock, water filter, gas-oil filter with water trap, Morse remote control, shaft, stern tube and propeller assembly.

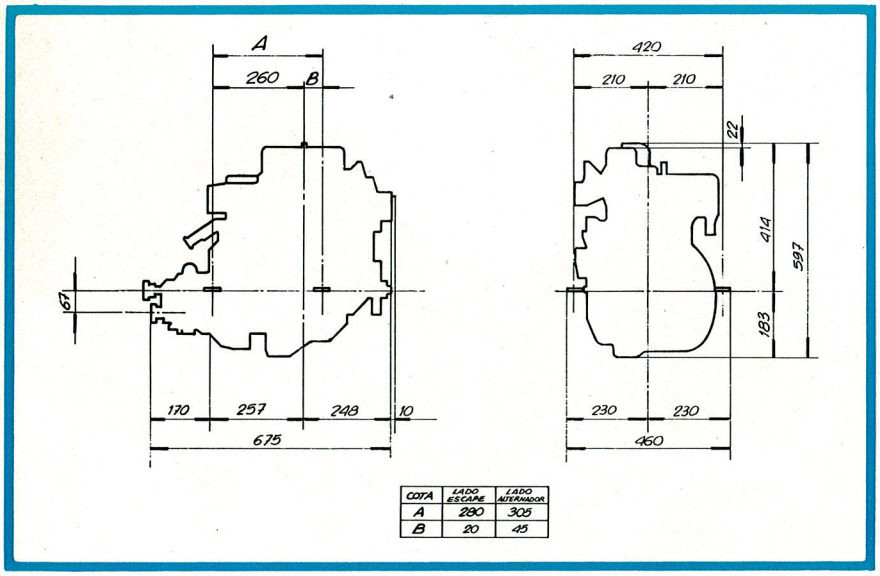

COTA	LADO ESCAPE	LADO ALTERNADOR
A	280	305
B	20	45

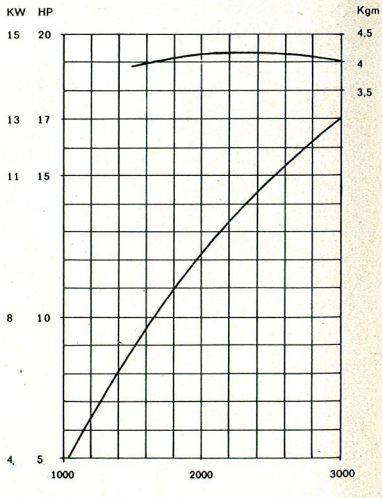

GRAFICAS MARTORELL, S.L.

Importer

BEACON

PLASTIC & METAL PRODUCTS, INC.

50 PARK AVENUE

NEW YORK, N. Y. 10016

(212) - 679 41 80

CABLE, BEACONPLAS NEW YORK - MILAN

Dealer

SOLÉ, S.A. Ctra. de Martorell a Gelida. Km. 2 - Teléf. 7751400 - Telegramas Enrisole - Telex 50168 SODI-E - MARTORELL (Barcelona)